


GATE VALVE

Gate Valve Flange ends

Screwed in bonnet, inside screw, non-rising stems,
Asbestos packing with PTFE rings
Flange ends as per BS: 10 Table-D

Max working pressure: 250 Psig.
Body pressure:-300 Psig.

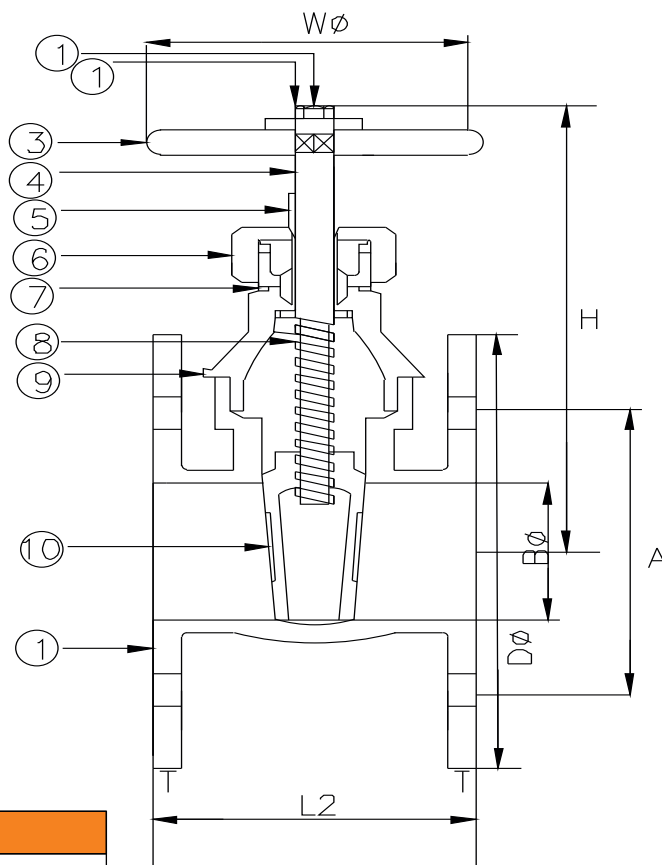

No.	Part	Material
1.	HEX Nut	SS
2.	Washer	SS/Brass
3.	Wheel	C.I./CR sheet (powder coated)
4.	Stem	Forged Brass
5.	Gland	Gun metal bronze
6.	Nut	Gunmetal bronze
7.	Packing	Asbestos with PTFE seats
8.	Check nut	Brass/Gunmetal
9.	Bonnet	Forged brass
10.	Wedge	Gunmetal bronze
11.	Body	Gunmetal bronze

SIZE	L2	øB	øD	T	øW	A	No. of holes
15mm	79	15	95	6	64	63	4
20mm	80	19	105	6	64	73	4
25mm	90	25	115	8	80	85	4
32mm	100	32	140	8	80	100	4
40mm	110	38	150	9	96	110	4
50mm	125	50	165	10	96	125	4
65mm	138	65	185	12	120	145	4
80mm	150	80	200	13	120	160	4
100mm	190	100	220	15	180	180	4