

GLOBE VALVE

GM GLOBE VALVE BOTH SIDE FLANGED END


Screwed in bonnet, Inside screwed, rising stem, asbestos packing with PTFE rings,

With PTFE TEFLON SEATS.

Flange ends TO BS : 10 table D

Max working pressure: 250 Psig.

Body pressure:-300 Psig.

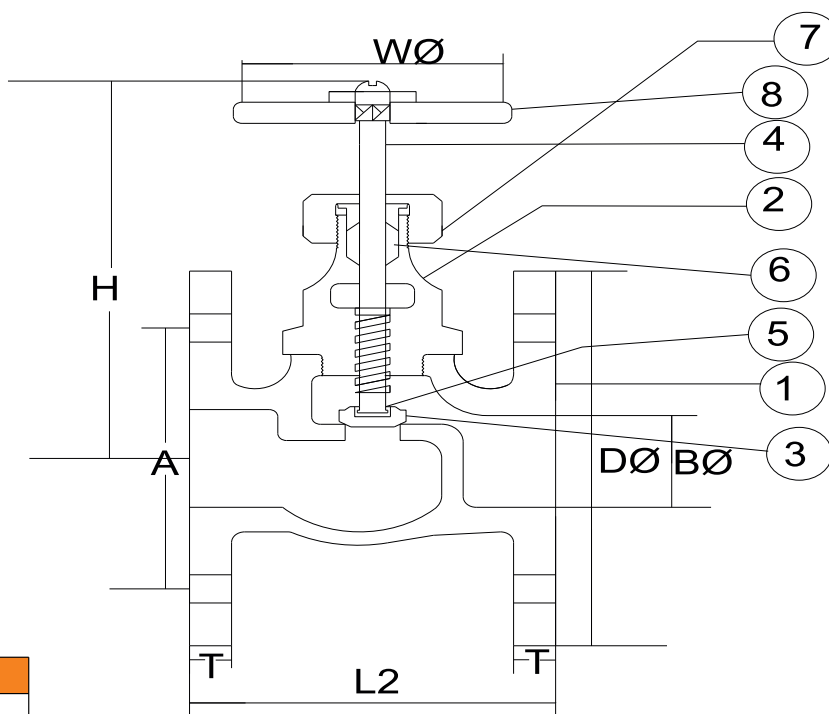

No.	Part	Material
1.	Body	C.M. bronze
2.	Bonnet	C.M. bronze
3.	Disc	Brass covering P.T.F.E. Teflon
4.	Stem	Brass
5.	Disc check nut	Brass
6.	Packing	Asbestos
7.	Nut	C.M. bronze
8.	Hand wheel	C.I./CR sheet

SIZE		DIMENSIONS						
mm	L2	D	T	W	H	B	A	No. of holes
15	64	95	7	60	80	15	65	4
20	69	102	7	60	88	20	73	4
25	89	115	8	83	112	25	82	4
32	92	120	8	83	120	32	94	4
40	108	135	9	105	125	38	104	4
50	110	150	9	105	135	50	115	4
65	140	165	11	130	164	65	127	4
80	175	185	13	140	190	80	145	4
100	190	215	16	185	220	100	180	4